

ProTAACS

Wireless Control

Technical Overview

General Description

ProTAACS wireless control units contain two separate relay switches allowing for individual control through the iProTAACS online sensors portal. The control unit relays can be switched on/off manually through the software or automatically by any wireless sensor notification assigned to a single sensor or group of sensors when a specified condition is detected.

Principle of Operation

The ProTAACS control unit has two separate relays that can be toggled on/off at will by either: (a) the iProTAACS.com web portal; (b) any device that triggers a notification on the same network.

Four LED indicators let the user know if the device is powered on, communicating with the online system and the status of each relay.

The user can manually turn a relay on or off through the iProTAACS software. Manual changes are either: (a) temporary based on a set duration (ex. activate the relay for 10 minutes then return to the default state); (b) perpetuated indefinitely until overridden.


Each of the units two relays can also be controlled automatically by any wireless sensor or group of sensors. Automatic relay switching can be triggered by setting the control parameters in a sensor notification from the system. The user can set the default state of each relay to on or off and user defined messages from sensors will cause the relay unit to switch to the non-default state. The relay switches back to its default state when the condition is no longer met.

Example Use: If a water sensor detects water at a certain level in a sump pit, the relay will switch ON, activating the pump. When water is no longer detected, the relay will switch OFF, deactivating the pump motor.



ProTAACS Wireless Control Features


- Allows for automated control.
- 10-amp or 30-amp units available.
- Two separate relays per unit.
- Can be triggered by any ProTAACS wireless sensor notification to activate upon detection of set conditions.
- Can be triggered manually through online monitoring interface.
- AC powered, always on for immediate response from paired sensors.

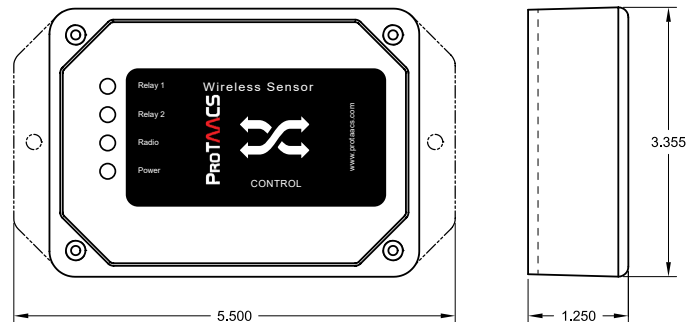

Applications

- Facilities / Building Operations
- Automated Systems
- Smart Buildings
- Manufacturing Processes
- Machine Control
- Lighting Control
- Sump and Water Evacuation
- Agriculture and Greenhouses

ProTAACS Wireless Control Unit Specifications

| Control Unit Relays | 10-Amp Units | 30-Amp Units |
|--|--|---|
| Initial Contact Resistance | Max. 100 mΩ | Max. 50 mΩ |
| Max Switching Power (resistive load) | 2500VA 150W (NO) 1662VA 150W (NC) | 8310VA (30A 277VAC) |
| Max Switching Voltage | 250 VAC, 100 VDC (0.5A) | 277 VAC |
| Max Switching Current | 10A (AC), 5A (DC) | 30A |
| Nominal Operating Power | 360 mW | Approx 800 mW |
| Operate Time (at nominal voltage / 20°C) | Max 10 ms | Max 20 ms |
| Release Time (at nominal voltage / 20°C) | Max 10 ms | Max 10 ms |
| Max Operating Speed | 20 times/min (at nominal switching capacity) | 20 times/min (at nominal switching capacity) |
| Number of Relays | 2 (individually controlled) | |
| Control Activation | <ul style="list-style-type: none"> - Automatic based on sensor notification settings - Manual through iProTAACS online software | |
| Power | | |
| Input Power | 5.5 VDC @ 900 mA | |
| Mechanical | | |
| Antenna | Connector: SMA Gain (dBi): 3.0 | |
| Indicator Lights | Four LED indicators <ul style="list-style-type: none"> - Power - Radio (RF) communication - Relay 1 status (On/Off) - Relay 2 status (On/Off) | |
| Enclosure | ABS Plastic UL94V-0 flame rating | |
| Dimensions | 5.5 x 3.355 x 1.25 in. (139.7 x 85.217 x 31.75 mm) | |
| Weight | 8 ounces | |
| Environmental | | |
| Operating Temperature | -40° to +85° C (-40° to +185° F) | |
| Certifications: |  900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05). | |

Note: ProTAACS control units require a ProTAACS wireless gateway for operation.